


## Product Specification

### 1. Product Feature



- ✧ One physical power button
- ✧ Bottom loudspeaker
- ✧ 4K ultra HD display
- ✧ IR (Infrared Ray) touch technology
- ✧ AG tempered glass 4mm Mohs level 7
- ✧ Compatible with detachable PC module
- ✧ USB 3.0 Auto switch to android
- ✧ Front USB 2.0 Auto switch to current channel
- ✧ Low parallax, 1 mm air gap

## 2. Dimension

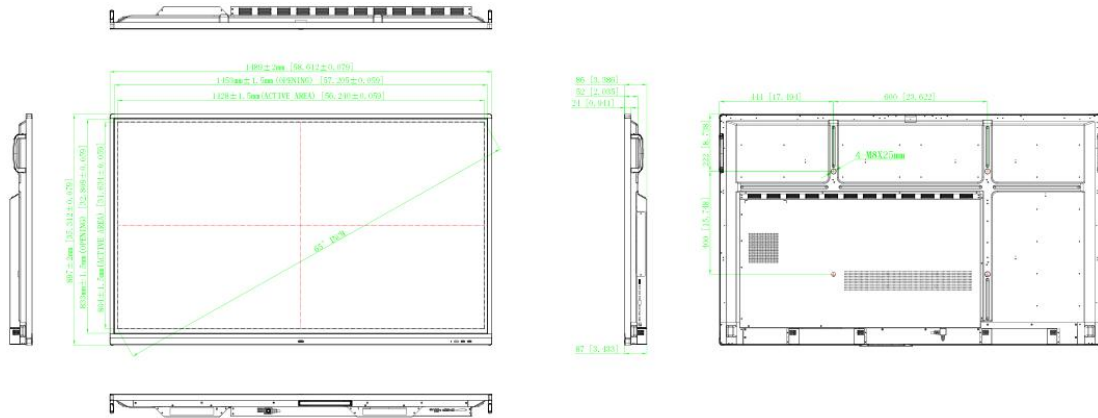

## 3. Display

Size	65 inch
Response Time	8ms
Aspect Ratio	16:9
Display Area	1428.48(H) × 803.52(V)mm
Pixel Pitch	0.372 × 0.372mm
Resolution	3840(H) × 2160(V)
Refreshing Frequency	60Hz
Display Color	1.07B(10bit)
Contrast Ratio	1200:1
Viewing Angle	178° (H/V)
Color Gamut	72%
Back Light Unit	DLED
Brightness with glass ( min )	300cd/m <sup>2</sup>
Brightness with glass ( typ )	350cd/m <sup>2</sup>
Life Time	≥30000 Hours

## 4. Android System

System Version	Android 8.0
CPU	A73 × 2+A53 × 2

GPU	Mali-G51 × 4
RAM	4GB
ROM	32GB

## 5. Touch System

Sensing Type	Infrared recognition
System	Windows10/Windows8/Windows7/Windows XP/Linux/Mac/Android/Chrome
Touch point	20 points touch
Touch Tool	Finger,Passive infrared pen
Minimum object size	3mm
Response Time	≤ 10ms
Accuracy	± 1.5mm
Writing Height	≤ 3mm
Surface Hardness	Toughened Glass with Level 7 of Mohs Standard
Interpolation Resolution	32768(W) × 32768(D)

## 6. Audio

Sound Channel	2.0
Output Power	2 × 12W

## 7. Power

Power Requirements	100-240V~ 50/60Hz 4.0A
Overall Power(Max.)	400W
Standby Power	≤ 0.5W

## 8. I/O port

HDMI IN	3
HDMI OUT	1
USB 2.0	3

USB 3.0	3
TOUCH OUT	2
VGA IN	1
AUDIO IN	1
AUDIO OUT	1
SPDIF	1
RS232	1
RJ45 IN	1

## 9. Physical Specifications

Dimension L × H × D	1489 × 897 × 87mm
Dimension (package) L × W × H	1656 × 204 × 1050mm
Thickness of machine and wall mount	117mm (WIB9060G)
Wall-hanging Screw Spec	M8 × 25mm
VESA	600 × 400mm
Net Weight	39.65kg
Gross Weight	53.60kg

## 10. Accessories

Power Cord(European/American /Australian/British standard optional)	× 2 (3 meters)
USB Touch Cable (Type A-B)	× 1 (5 meters)
HDMI Cable	× 1 (3 meters)
Writing Pen	× 2
Wall mount	× 1
Remote Control	× 1
Battery	× 2 (AAA)

## 11. Environmental Conditions

Operation Temperature	0°C – 40°C
Operation Humidity	10% – 90%RH
Storage Temperature	-20°C – 60°C
Storage Humidity	10% – 90%RH
Altitude	Below 5000 meters

## 12. Compatible Module ( optional )

PC Model	MT43A
----------	-------

## 13. Statement

The product pictures of this specification only indicate that there may be slight difference in product effects (included but not limited to appearance, color and size). Please refer to the product.

Due to the influence of product configuration and manufacturing process, the actual size/weight of the fuselage may differ.

In order to provide accurate specification parameters and product characteristics as much as possible, it is possible to adjust and revise the text description and picture effect of this specification in real time, so as to match the actual product performance, specifications and other information.

No special notice will be given if necessary.



NOTICE : The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.