6/21/2017 VX2770Smh-LED




Key **Features**

27" Frameless LED Display | 1920 x 1080 Full HD IPS panel | Versatile connectivity with HDMI, DVI and VGA | Ideal for home entertainment and color critical applications



Product **Description**

ViewSonic's VX2770Smh-LED features an LED backlit 27" frameless widescreen monitor with up to 40% energy savings compared to a regular 27" monitor. Environmentally friendly mercury-free VX2770Smh-LED offers Full HD 1920x1080 resolution, HDMI and DVI with HDCP and VGA inputs, SRS Premium Sound, external power supply, and 30,000,000:1 MEGA Dynamic Contrast Ratio. The stylish glossy ID and thin profile combine to make it the center piece to your home or office. While the SuperClear IPS panel with wide viewing angles and high contrast ratio delivers extraordinary visual entertainment. A 3 year warranty, the industry's best pixel performance policy, energy saving Eco mode and Windows 7 certification make VX2770Smh-LED an excellent choice for entertainment and gaming.

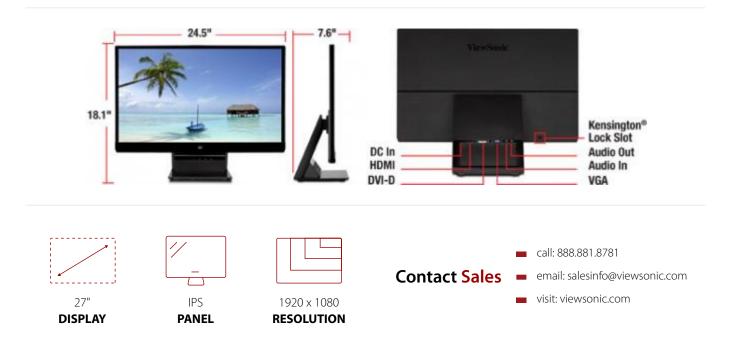

Display:

Display Size (in.):	27
Туре:	IPS
Resolution:	1920 x 1080
Static Contrast Ratio:	1000:1
Dynamic Contrast Ratio:	30,000,000:1
Light Source:	LED
Brightness:	250 cd/m2
Response Time (Typical GTG):	7ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	3H Anti-glare, hard-coating
Compatibility:	
PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080
Connector:	

3.5mm Audio In(1), 3.5mm Audio Out(1), HDMI(1), VGA(1), DVI-D(1)

Audio:

Internal Speakers:	1.5-watt (x2)
Power:	
Eco Mode (Conserve):	22W
Eco Mode (optimized):	26W
Consumption (typical):	30W
Voltage:	AC 100-240V (universal), 50-60Hz

Additional Hardware:

Kensington Lock Slot:

Controls:

Physical Controls:	1, 2, Down, Up, Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select(D-SUB, DVI-D, HDMI), Color Adjust (sRGB, Bluish, Cool,Native, Warm, User Color [R,G,B]), Audio Adjust (volume,mute, audio input), Information, Manual Image Adjust (H/VPosition, Horizontal Size, Fine

Operating Conditions:

Analog Sync:

Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	20-90%
Video Signal:	
Frequency Horizontal:	24~83kHz
Frequency Vertical:	50~76Hz
Video Input:	

Separate Sync

Ergonomics:	
Tilt (Forward/Back):	5° / 20°
Weight (imperial):	
Net (lbs):	11
Gross (lbs):	16.5
Weight (metric):	
Net (kg):	5
Gross (kg):	7.5
Dimensions (imperial) (WxHxD):	
Packaging (in.):	26.6 x 20.6 x 7.0
Physical (in.):	24.5 x 18.1 x 7.6
Dimensions (metric) (WxHxD):	

Packaging (mm):	676 x 522 x 177
Physical (mm):	622.3 x 459.3 x 192.5

General:

Regulations: CE,CB, BSMI, SASO, C-tick, e-standby, KC, UL/cUL,FCC-B (including ICES003), NOM, GOST-R/Hygienic,UkrSEPRO, Erp, CCC, China Energy, EPEAT Silver,WEEE, RoHS, SVHC list

PACKAGE CONTENTS: VX2770Smh-LED display, power cable, AC/DC adapter, VGA cable, HDMI cable, Quick Start Guide, View Sonic Wizard CD (available in some countries only)

Power Management: ENERGY STAR® standards

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907659719

Accessories:

Awards:



Copyright © ViewSonic Corporation 2000-2017. All rights reserved. (06/20/2017 09:44 PM PST)