

Samsung SMART Signage QMN Series

Share Clear Messaging that Resonates through Intelligent Picture Quality

Samsung's QMN Series displays deliver content with added precision and visual impact while also improving operational efficiency. Through advanced UHD picture quality, the QMN Series displays foster an inviting and memorable viewing environment in any indoor setting. Additionally, Backed by the powerful TIZEN operating system, the QMN Series displays feature a host of business-ready functionalities while also protecting business and customer data through enhanced security measures.

Highlights

- Revitalize customer engagement in retail and transportation settings
- Elevate content quality through a unique combination of picture-enhancing features
- Facilitate secure, PC-free meetings through rigid three-layer protection
- Manage performance and identify potential disruptions with detailed remote monitoring
- Maintain content integrity through dust- and glare-resistant exterior glass

Industry Trend

As businesses seek to extend viewer engagement and reinforce their own branding, many see advanced digital signage as a versatile and effective solution. Businesses want to showcase content as crisply and clearly as possible, with new innovations such as UHD picture quality offering customers something new and exciting. Beyond graphic precision and accuracy, businesses also seek new technologies that make their lives easier. This flexibility ranges from features that expand operational capabilities and reduce maintenance to the maximization of data security and protection.

Why Samsung QMN Series?

Whether for a retailer promoting new sales or a transportation hub keeping travelers on schedule, clear information delivery drives success. Samsung's QMN Series help businesses achieve these goals by leveraging Samsung's Intelligent Picture Quality technology to elevate content delivery in any setting. This refined presentation transforms content from any source to UHD-level quality, and optimizes on-screen text and imagery with crisp edges and fine detail. Recent advancements have made our signage offerings even stronger and empower businesses to develop and deploy content with the confidence that it will perform continuously.







Intelligent Picture Quality







Intelligent

Picture Mode











Key Features



Streamline Operational Efficiency

The embedded MagicINFO Player S6, backed by the powerful TIZEN operating system, boosts the displays overall performance, allows for painless content management and ensures seamless content transition and playback.




Maintain Continuous Display Performance

Beyond security and content management, QMN Series users can trust the displays' remote management for fast, efficient issue mitigation. Users can monitor and diagnose irregularities – both on their own and with help from Samsung's 24/7 Network Operations Center – from any location.



Enjoy Convenient Display Management

The QMN Series' integrated centralized infrared receiver (IR) ensures easier and more flexible user control. Each display receives signals on individual panels via Central IR, and users can navigate the IR functionality from various locations to further augment uninterrupted performance.

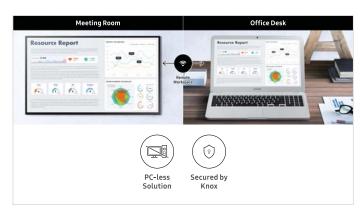


Empower Secure and Remote Collaboration

Samsung's KNOX platform provides rigid three-layer protection while also securing and controlling USB and user network exchange through dedicated signage device management. With added security, businesses can facilitate remote, PC-free meetings without risk or complexity.



Shield Content from Outside Interference

The QMN Series' durable, IP5x-validated design ensures continuous, glare-free content delivery regardless of environmental conditions. As a result, transportation hubs and other arenas susceptible to dust, dirt and lighting exposure can activate and run the displays without an external enclosure.

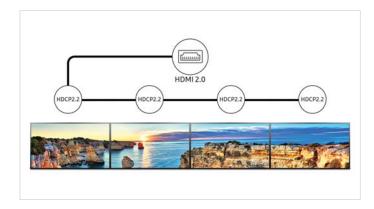

Accelerate Multi-Screen Content Delivery

For added flexibility, the QMN Series offers users HDMI 2.0 and DP1.2 port connectivity. This versatility ensures a consistent 60 Hz. refresh rate and optimal clarity regardless of the source. Additionally, users can configure UHD daisy chains up to 2x2 in size through the HDMI 2.0 port.

Specification

| | MODE | L | QM43N | QM49N | QM55N | QM65N | QM75N | |
|----------------------------|--|-----------------------|--|--|---|-----------------------------|-----------------------------|--|
| | Diagonal Size | Class | 43 | 49 | 55 | 65 | 75 | |
| | Diagonal Size | Measured | 42.5 | 48.5 | 54.6 | 64.5 | 74.5 | |
| | Туре | | New Edge | New Edge | New Edge | New Edge | New Edge | |
| | Resolution | | UHD (3840 x 2160) | UHD (3840 x 2160) | UHD (3840 x 2160) | UHD (3840 x 2160) | UHD (3840 x 2160) | |
| Panel | | | | | | | | |
| | Pixel Pitch (mm) | | 0.2451 x 0.2451 | 0.093 x 0.279 | 0.105 x 0.315 | 0.372 x 0.372 | 0.42975 x 0.42975 | |
| | Active Display Area | | 941.184 (H) x 529.416 (V) | 1073.78 (H) x 604.00 (V) | 1209.6 (H) x 680.4 (V) | 1428.48 (H) x 803.52 (V) | 1650.24 (H) x 928.26 (V) | |
| | Brightness (Typ.) | | 500 | 500 | 500 | 500 | 500 | |
| | Contrast Ratio (Typ.) | | 4000 : 1 | 4000 : 1 | 4000 : 1 | 5000:1 | 6000 : 1 | |
| | | | | | | | | |
| | Viewing Angle (H/V) | | 178 / 178 | 178 / 178 | 178 / 178 | 178 / 178 | 178 / 178 | |
| | Response Time (G to G) | | 8ms | 8ms | 8ms | 8ms | 8ms | |
| | Display Colors | | 16.7M | 16.7M | 16.7M | 16.7M | 16.7M | |
| | Color Gamut | | 72% | 72% | 72% | 72% | 72% | |
| | Operation Hour | | 24 / 7 | 24 / 7 | | | | |
| | | | | | 24 / 7 | 24 / 7 | 24 / 7 | |
| | Haze | | 44% | 25% | 25% | 44% | 44% | |
| Display | Dynamic C/R | | MEGA | MEGA | MEGA | MEGA | MEGA | |
| | H-Scanning Frequency | | 30 ~ 81kHZ | 30 ~ 81kHZ | 30 ~ 81kHZ | 30 ~ 81kHZ | 30 ~ 81kHZ | |
| | V-Scanning Frequency | | 48 ~ 75HZ | 48 ~ 75HZ | 48 ~ 75HZ | 48 ~ 75HZ | 48 ~ 75HZ | |
| | | | | | | | | |
| | Maximum Pixel Frequency | | 594MHz | 594MHz | 594MHz | 594MHz | v 594MHz | |
| Sound | Speaker Type | | | | Built in Speaker (10W + 10W) |) | | |
| | | RGB | DVI-D, Display Port 1.2 (1) | DVI-D, Display Port 1.2 (1) | DVI-D, Display Port 1.2 (1) | DVI-D, Display Port 1.2 (1) | DVI-D, Display Port 1.2 (1) | |
| | INPUT | VIDEO | HDMI 2.0 (2) | HDMI 2.0 (2) | HDMI 2.0 (2) | HDMI 2.0 (2) | HDMI 2.0 (2) | |
| | | | | | | | | |
| | | HDCP | HDCP2.2 | HDCP2.2 | HDCP2.2 | HDCP2.2 | HDCP2.2 | |
| | | AUDIO | | | Stereo mini Jack, DVI, HDMI | | | |
| | | USB | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | |
| Connectivity | OUTPUT | RGB | HDMI 2.0 (Loop-out) | HDMI 2.0 (Loop-out) | HDMI 2.0 (Loop-out) | HDMI 2.0 (Loop-out) | HDMI 2.0 (Loop-out) | |
| | | | | | | | | |
| | | VIDEO | N/A | N/A | N/A | N/A | N/A | |
| | | AUDIO | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | |
| | | Power Out | N/A | N/A | N/A | N/A | N/A | |
| | | USB | N/A | N/A | N/A | N/A | N/A | |
| | EVERNIAL CONTRO | | IV/A | | | | IV/A | |
| | EXTERNAL CONTROL EXTERNAL SENSOR | | | | C (in/out) thru stereo jack, RJ- | | | |
| | | | IR | I R | IR | I R | IR | |
| | Tuner | | N/A | N/A | N/A | N/A | N/A | |
| | Type | | Internal | Internal | Internal | Internal | Internal | |
| Power | | | Internat | | | | Internat | |
| | Power Supply | | | | 00-240 V~(+/-10%), 50/60 Hz | | | |
| | Power Consumption | Max [W/h] | 121 | 132 | 143 | 176 | 220 | |
| | | Typical [W/h] | 76 | 91 | 96 | 125 | 159 | |
| | | | 110 | 120 | 130 | 160 | 200 | |
| | | | | | | | | |
| | | Sleep mode | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | |
| | | Off mode | N/A | N/A | N/A | N/A | N/A | |
| Mechanical Spec | Dimension (mm) | Set | 970.2 x 563.2 x 58.5 | 1102.8 x 637.8 x 59.4 | 1238.6 x 714.2 x 59.0 | 1457.5 x 837.3 x 59.4 | 1684.6 x 966.7 x 60.4 | |
| | | Package | 943.2 x 531.4 x 1081.5 | 1075.8 x 606.0 x 1233.7 | 1211.6 x 682.4 x 1389.4 | 1430.5 x 805.5 x 1640.6 | 1652.2 x 930.3 x 1895.0 | |
| | | | | | | | | |
| | Weight (kg) | Set | 10 | 13.5 | 17.8 | 25.2 | 37.8 | |
| | morgine (mg/ | Package | 13.3 | 17.7 | 22.4 | 33.1 | 50.6 | |
| | VESA Mount Protection Glass | | 200 x 200 | 200 x 200 | 200 x 200 | 400 X 400 | 400 X 400 | |
| | | | N/A | N/A | N/A | N/A | N/A | |
| | | | | | | | | |
| | Stand Type Bezel Width (Top/Side/Bot) (mm) Operating Temperature | | Foot Stand (Optional) | Foot Stand (Optional) | Foot Stand (Optional) | No | No | |
| | | | 13.5 (Top,Side), | 13.5 (Top,Side), | 13.5 (Top,Side), | 13.5 (Top,Side), | 16.2(top,side), | |
| | | | 17.7 (Bottom) | 17.7 (Bottom) | 17.7 (Bottom) | 17.7 (Bottom) | 19.3(bottom) | |
| | | | | | | | | |
| Operation | | ure | 0°C ~ 40°C | 0°C ~ 40°C | 0°C ~ 40°C | 0°C ~ 40°C | 0°C ~ 40°C | |
| - peración | Humidity | | 10 ~ 80% | 10 ~ 80% | 10 ~ 80% | 10 ~ 80% | 10 ~ 80% | |
| | Key | | UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 | | | | | |
| Feature | ricy | | ond Signage display Still & Light Signage with Built-in Magicinto So, SSSP 6.0 | | | | | |
| | | | Temperature Sensor, Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Speaker (10W 2ch), | | | | | |
| | Special | H/W | Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Speaker (10W 2ch), Video Wall Daisy Chain (HDCP2.2:4EA,HDCP1.4:7EA), IP5x, Wi-Fi/BT | | | | | |
| | | | video wati Daisy Criairi (HDCP2.2:4EA,HDCP1.4:7EA), IP5X, WI-FI/BT | | | | | |
| | | S/W | Auto Source Switching & Poccovery LED Home LIL Button Lock Hot key entire Dlug & Dlay (Initial Setting) | | | | | |
| | | 3/ W | Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) | | | | | |
| | | Processor | Coretex A72 1.7GHz Quad-Core CPU | | | | | |
| | | On Chin Control | 50.000.112 51.2 quad 50.5 61.5 | | | | | |
| | | On-Chip Cache | L1 Instruction Cache : 48KB / L1 Data Cache : 32KB / L2 Cache : 2MB | | | | | |
| | | Memory | ET INSTRUCTION CACHE: 40KB / ET DATA CACHE: 32KB / EZ CACHE: 2MB | | | | | |
| | | Clock Speed | 1.7GHz | | | | | |
| | | | | | | | | |
| | | Main Memory Interface | 2.5GB / LPDDR41.5GHz 64bit | | | | | |
| | Internal Player (Embedded H/W) | Graphics | Graphic resolution : 1920x1080, Output resolution : 3840x2160 (Scale up from graphic processing result.) | | | | | |
| | | Storage (FDM) | | | | | | |
| | | | 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG | | | | | |
| | | Multimedia | | | | | | |
| | | Muttimedia | | | | | | |
| | | IO Danta | | | | | | |
| | | IO Ports | USB 2.0 | | | | | |
| | Operating System | | Tizen 4.0 (VDLinux) | | | | | |
| | | Safety | | 60950-1 | | | | |
| | Safety | | | Class A | | | | |
| Certification | | | | | | | | |
| Certification | EMC | | | ENERGY STAR 7.0 (USA) | | | | |
| Certification | | | | ENERG | Y STAR 7.0 (USA) | | | |
| Certification | EMC Environment | | Ouid | | | ller Batteries | | |
| Certification | EMC | | Quick | < Setup Guide, Warranty Card | d, Power Cord, Remote Contro | ller, Batteries | | |
| | EMC Environment | Stand | Quick | < Setup Guide, Warranty Card | | ller, Batteries | | |
| | EMC Environment Included | | Quicl | k Setup Guide, Warranty Card New S | d, Power Cord, Remote Contro Stand Accessory | ller, Batteries | | |
| | EMC Environment | Mount | Quicl | k Setup Guide, Warranty Card New S W | d, Power Cord, Remote Contro itand Accessory MN4070SE | ller, Batteries | | |
| Certification Accessories | EMC Environment Included | | Quicl | k Setup Guide, Warranty Card New S W | d, Power Cord, Remote Contro Stand Accessory | ller, Batteries | | |

About Samsung Electronics Co., Ltd.

Samsung inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, network systems, and memory, system LSI, foundry and LED solutions. For the latest news, please visit the Samsung Newsroom at http://news.samsung.com.

SMART Signage

For more information about Samsung SMART Signage QMN Series Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions and the samsung series of the samsung

Copyright © 2018 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.

129 Samseong-ro, Maetan-dong, Yeongtong-gu, Suwon, Gyeonggi-do, Korea

